



Pilot Terminal Installation Guide

Triple E Technologies, LLC

Version 052516.01

Triple E Technologies, LLC
P.O. Box 2677 Post Falls, ID 83877
Phone: 208.777.9300 | Fax: 208.777.9304

© 2016 Triple E Technologies, LLC

All rights reserved. No parts of the content of this work may be reproduced or transmitted in any form without the written permission of Triple E Technologies, LLC.

The information in this document is subject to change without notice. Although Triple E Technologies, LLC has attempted to ensure the accuracy of the contents of this document, this document may include errors or omissions. The examples and sample programs are for illustration only and may not be suited to your purpose. You should verify the applicability of any example or sample program before placing the software into productive use. The examples in this document may not exactly replicate your system configuration, but the functions will remain the same.

The Triple E Technologies, LLC logo and OneTouch DataManager are registered trademarks of Triple E Technologies, LLC. All other brand names and trademarks associated with Triple E Technologies, LLC products and services are trademarks of Triple E Technologies, LLC. All other brand names and trademarks in this document are the property of their respective owners.

Comments, questions, or concerns? Please email all inquiries to helpdesk@e3tek.com

Table of Contents

Overview	1
Manufacturer Supplied Components	1
Hardware Identification	1
Installation	2

Overview

The Pilot Terminal will arrive fully assembled. This guide details the procedures for connecting necessary components and peripherals to the unit.

The Pilot Terminal must be connected to a Pioneer Card Processor in order to function.


Manufacturer Supplied Components

The Pilot Terminal is shipped with the manufacturer supplied components listed below:

1. VeriFone VX500 series point of sale terminal
2. AC power adaptor
3. Pioneer cable
4. FCC Required Safety and Regulatory Documentation
5. VeriFone Setup and Feature Documentation



Hardware Identification

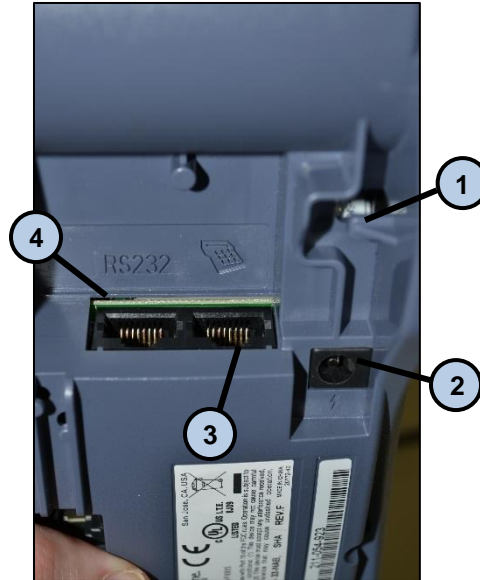

1. Cable keeper
2. Power port
3. Keypad port
4. RS232 port

Installation

1. Locate RS232 and keypad ports on the back of the unit.



2. Connect the RS232 end of the Pioneer cable to the RS232 port.



3. If using an optional external keypad (not supplied), connect it to keypad port.



4. Route AC adaptor cable through cable keeper notch and connect it to power port.



5. Plug in AC adaptor to power on Pilot Terminal.



- END INSTALLATION -

Your Pilot Pro Terminal is now ready for use. Please contact Triple E Customer Support by phone at (888) 407-6077 or by email at helpdesk@e3tek.com for assistance configuring the Pilot Pro software. To learn more about using the Pilot Pro Terminal, please see our [Pilot Pro POS](#) and [Pilot Pro SVC](#) user guides.